


# 大熊町一時立入時放射線モニタリング結果(きなやん宅)2階

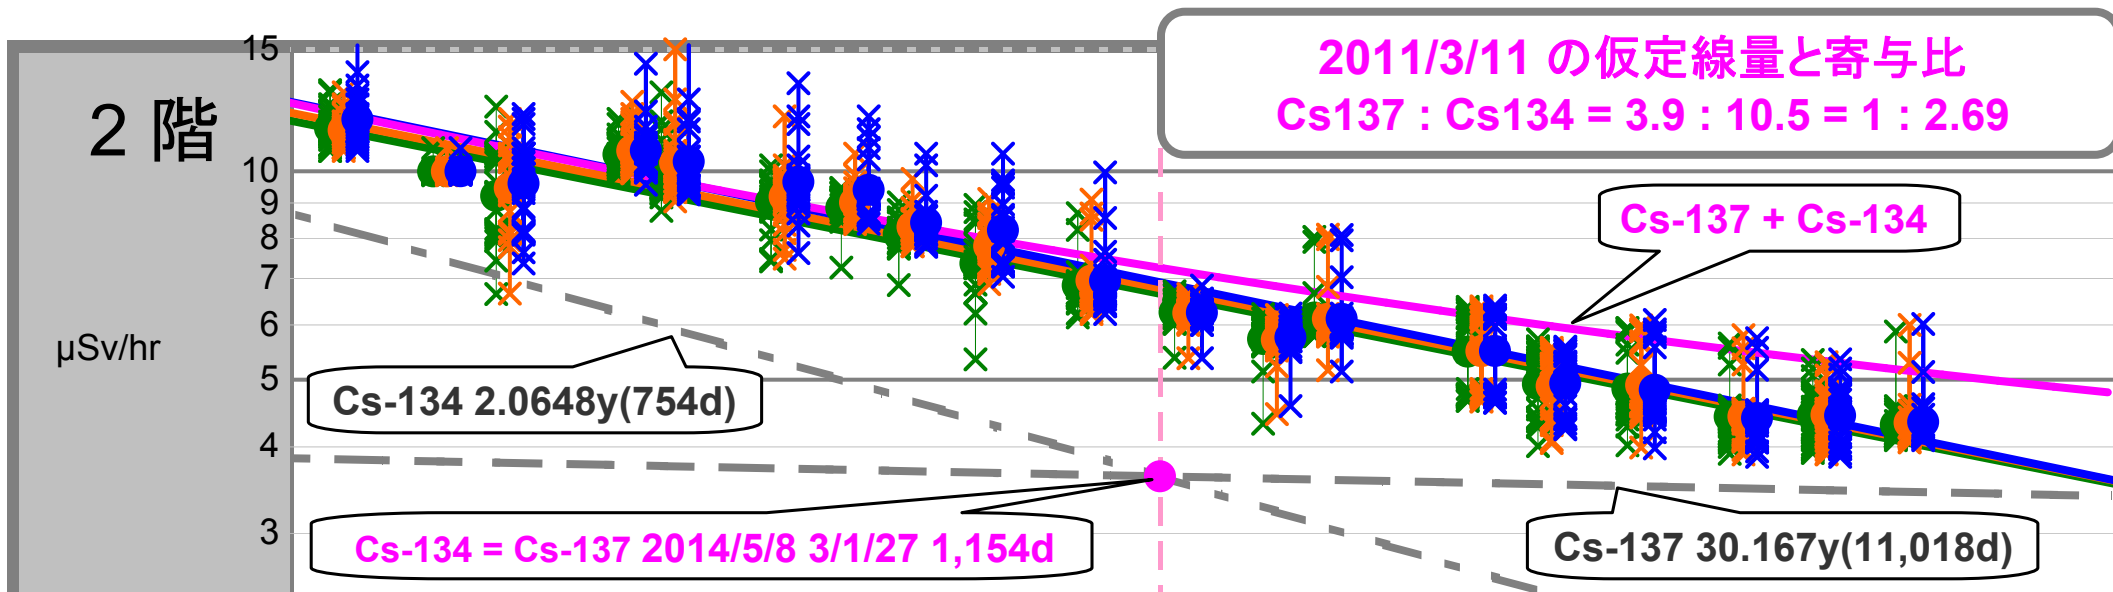

測定年月日	'11/11/26	'12/3/18	'12/5/26	'12/10/7	'12/11/23	'13/3/23	'13/6/8	'13/8/10	'13/11/2	'14/2/22	'14/6/8	'14/9/13	'14/11/8	'15/4/25	'15/7/11	'15/10/17	'16/2/6	'16/5/7	'16/8/6
3/11経過日数	260	373	442	576	623	743	820	883	967	1,079	1,185	1,282	1,338	1,506	1,583	1,681	1,793	1,884	1,975
平均値	11.88	10.00	9.60	10.72	10.33	9.65	9.40	8.43	8.22	6.95	6.25	5.75	6.12	5.50	4.94	4.84	4.40	4.44	4.35
標準偏差	1.10	1.02	1.16	1.09	1.14	1.13	1.11	1.08	1.13	1.11	1.05	1.06	1.11	1.14	1.11	1.14	1.11	1.11	1.10
前回比	-	84%	96%	112%	96%	93%	97%	90%	98%	85%	90%	92%	106%	90%	90%	98%	91%	101%	98%
平均値	11.46	9.99	9.46	10.70	10.29	9.19	9.01	8.31	7.80	6.95	6.24	5.71	6.12	5.50	4.90	4.91	4.42	4.45	4.33
標準偏差	1.05	1.02	1.16	1.07	1.13	1.11	1.06	1.06	1.09	1.11	1.05	1.07	1.11	1.14	1.12	1.13	1.11	1.11	1.10
前回比	-	87%	95%	113%	96%	89%	98%	92%	94%	89%	90%	91%	107%	90%	89%	100%	90%	101%	97%
平均値	11.54	10.00	9.21	10.57	10.11	9.04	8.85	8.11	7.36	6.84	6.26	5.73	6.15	5.49	4.93	4.85	4.42	4.45	4.31
標準偏差	1.06	1.02	1.17	1.06	1.11	1.09	1.06	1.06	1.12	1.08	1.05	1.08	1.10	1.13	1.12	1.13	1.11	1.10	1.08
前回比	-	87%	92%	115%	96%	89%	98%	92%	91%	93%	91%	92%	107%	89%	90%	99%	91%	101%	97%
傾き	切片	1cm	-0.000262446	1.129874511	1m	-0.000266053	1.138123071	2m	-0.000273612	1.151424182									
R <sup>2</sup>	実効半減期	1cm	0.966889097	1,147d(3.14y)	1m	0.964038321	1,131d(3.10y)	2m	0.959184957	1,100d(3.01y)									